


**INFO-TECH** CITROËN Racing C2 R2 MAX N° 23/09.

**Subject:** Gearbox bracket.

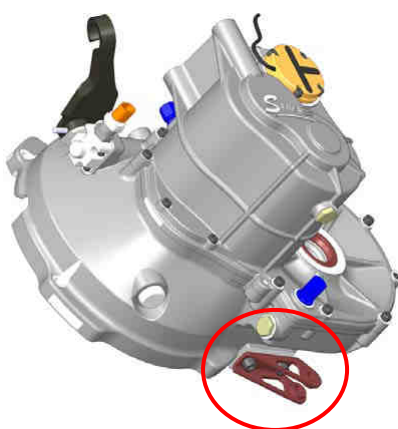

Dear Customers,

We ask you to pay attention about the loosening of the gearbox anti torque bracket.

The loosening of this bracket may create a dangerous engine movement (around engine and gearbox mountings) and damage the gearbox body and the bracket.

We recommend you to check the bracket tightening in accordance with gearbox SADEV notice sheet (loctite 243, torque 5.5 DaN.m).

You can also find this information in SADEV gearbox notice sheet, downloading by the following link:

[http://www.piecescitroensport.citroen.com/NR/rdonlyres/51C68D84-FA58-484F-B46F-C1EBAFE48859/207897/C2R2\\_CitroenSport\\_ANG11092009.pdf](http://www.piecescitroensport.citroen.com/NR/rdonlyres/51C68D84-FA58-484F-B46F-C1EBAFE48859/207897/C2R2_CitroenSport_ANG11092009.pdf)

Thank you for your attention.

JP, Gauduchon le 09/12/09