




C2R2 Max


F11
BRAKE DISKS

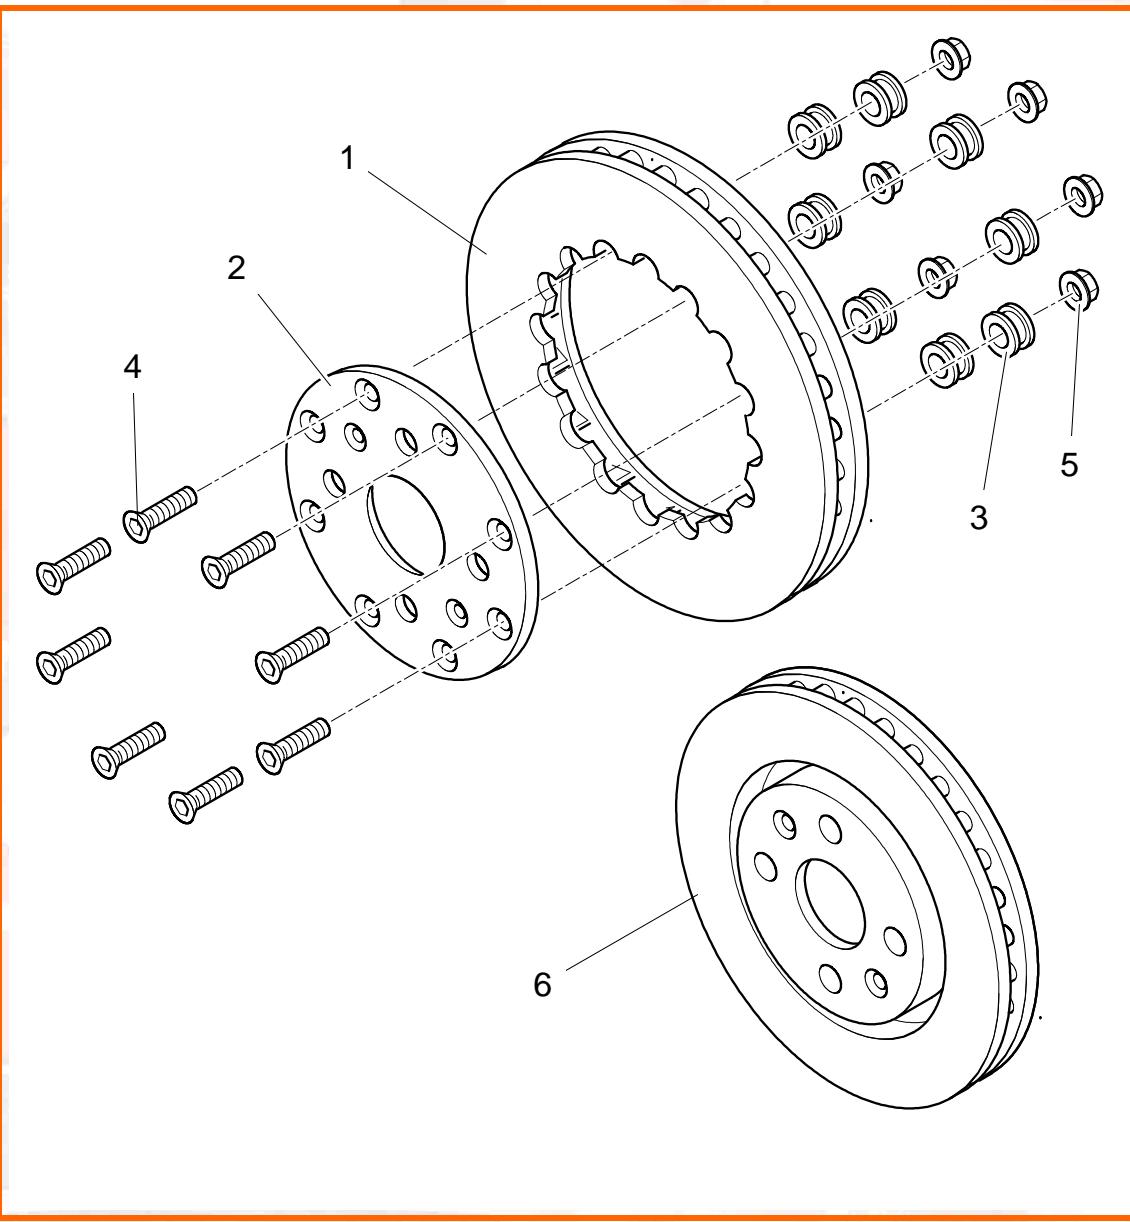

Fitting front brake disks - asphalt tracks.

Fit the bowl with the brake disk, using the spools (ref. 3), the screws (ref. 4) and the nuts (ref. 5).

Be sure to fit the bowl in the right direction; the chamfers intended to receive the countersunk screws must not be fitted on the brake disk side.

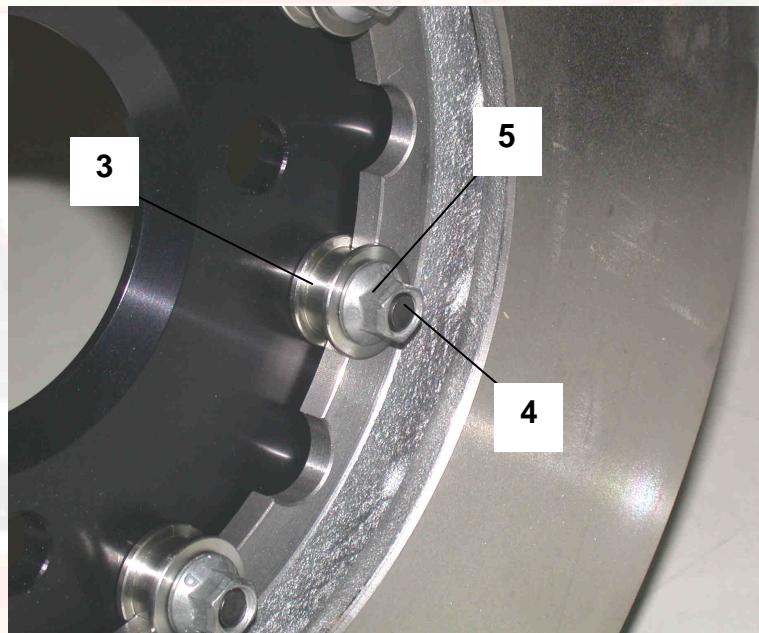

End result:



F11
Brake Disks



F
BRAKING
SYSTEM